



Technical Data


B-2960-XX

1" SHOWER ROD FLANGE PAIR, LIGHT DUTY

-BC = BRIGHT CHROME
-SC = SATIN CHROME



W/O SET SCREW

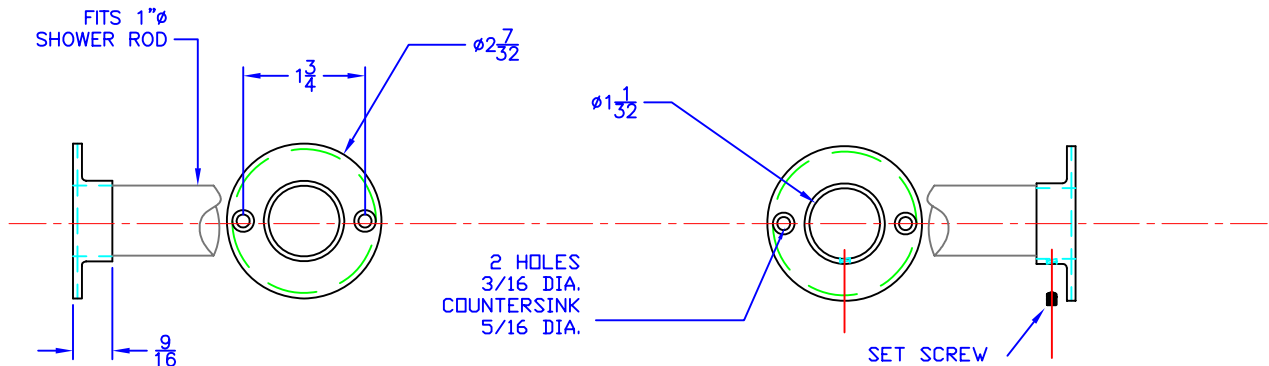

Construction:

FLANGES: SOLID CAST BRASS.
MTG. HOLES: (2) 3/16"Ø CTSK. TO 5/16" IN DIAMETER.
SET SCREW: (1) 8-32 X 3/16" LONG SLOTTED, THREADS INTO ONE FLANGE TO SECURE SHOWER ROD.
FINISHES AS NOTED.

Operation:

HOLDS 1"Ø SHOWER ROD (NOT INCLUDED WITH THIS PART#)

Installation:

USE BOTH FLANGES AS TEMPLATE TO LOCATE AND DRILL HOLES.
FASTEN ONE OF THE FLANGES TO WALL.
INSTALL SHOWER ROD INTO FASTEN FLANGE, SLIDE OTHER FLANGE ONTO SHOWER ROD.
FASTEN OTHER FLANGE TO WALL.
SECURE SHOWER ROD WITH SUPPLIED SET SCREW.

Guide Specification:

SOLID CAST BRASS FLANGES.
FITS 1"Ø SHOWER ROD (NOT INCLUDED)