Technical Data
S-2661-XX

DOUBLE RECESSED VERTICAL TOILET PAPER HOLDER

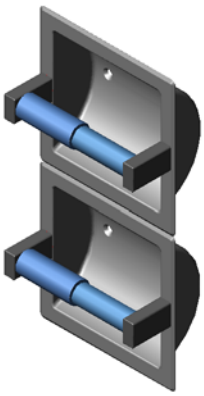

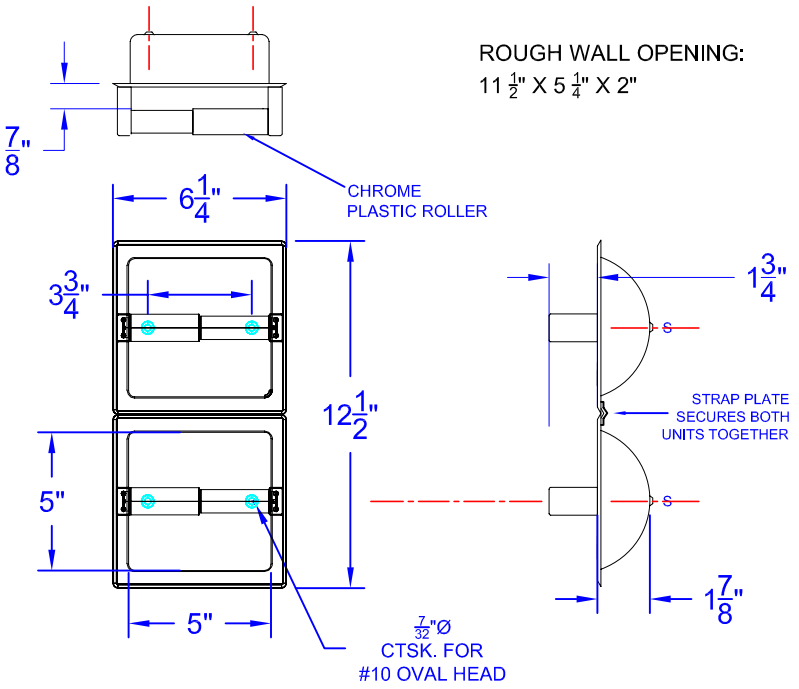

FINISH CODE: -XX
-SS = SATIN
-BS = BRIGHT
-PC = POWDER COATED (SPECIFY COLOR)

DRY WALL CLAMP
S-2619-01

MOUNTING SYSTEMS

TILE TYPE LUGS
S-2601-01

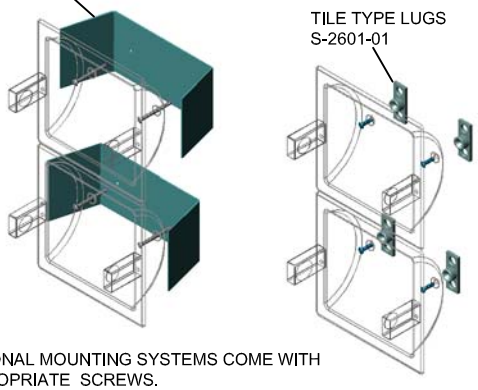

OPTIONAL MOUNTING SYSTEMS COME WITH APPROPRIATE SCREWS.

Construction:

SHELLS (2): 22 GAUGE TYPE 304 STAINLESS STEEL FORMED ONE PIECE WITH BEVELED EDGES. (2) 7 /32"Ø MTG. HOLES CTSK. FOR A #10 OVAL HEAD SCREW. SHELLS ARE FASTENED TOGETHER SIDE BY SIDE WITH A 22 GA. GALVANIZED STRAP PLATE.
ROLLER POSTS: 22 GAUGE TYPE 304 STAINLESS STEEL FORMED ONE PIECE. FASTEN TO SHELL FROM BEHIND.
ROLLER: CHROME PLATED PLASTIC. SPRING LOADED FOR REMOVAL AND RELOAD.
SCREWS: COMES WITH (2) #10 X 1" OVAL PHILIPS STAINLESS STEEL SMS.

Operation:

HOLDS TWO SINGLE ROLLS OF TOILET TISSUE PAPER OF STANDARD SIZE IN A VERTICAL POSITION.
ROLLER ALLOWS FOR QUICK LOADING OF TOILET TISSUE PAPER,

Installation:

ROUGH WALL OPENING OF 11 1/2" X 5 1/4" X 2" DEEP REQUIRED.
USE SHELL TO MARK LOCATION.
CUT OPENING THROUGH WALL.
FASTEN TO WALL USING SCREWS PROVIDED OR OPTIONAL MOUNTING SYSTEMS SHOWN ABOVE.

CAUTION: RECESSED SHELL REQUIRES NO OBSTRUCTIONS BEHIND WALL. UNIT IS ONLY AS STRONG AS THE ANCHORING DEVICES AND THE WALL ON WHICH IT IS MOUNTED TO.

Guide Specification:

DOUBLE TOILET TISSUE PAPER HOLDER.
VERTICAL RECESSED MOUNTING.
FABRICATED FROM TYPE 304 STAINLESS STEEL IN FINISHES REQ. (AS LISTED ABOVE)
SPRING LOADED CHROME PLASTIC ROLLER TO HOLD A SINGLE TOILET TISSUE ROLL IN EACH SHELL.
ROUGH WALL OPENING REQUIRED IS 11 1/2" X 5 1/4" X 2" DEEP.

The manufacturer reserves the right to make changes in design and material without formal notice and without incurring obligation

© Copyright 2005
Brey-Krause Manufacturing

Brey-Krause Manufacturing
1209 West Lehigh Street, Bethlehem, PA 18018
Phone: 610.867.1401 Fax: 610.866.1433
www.breykrause.com