




Technical Data

S-4044-SS ANTI-LIGATURE TOILET PAPER HOLDER

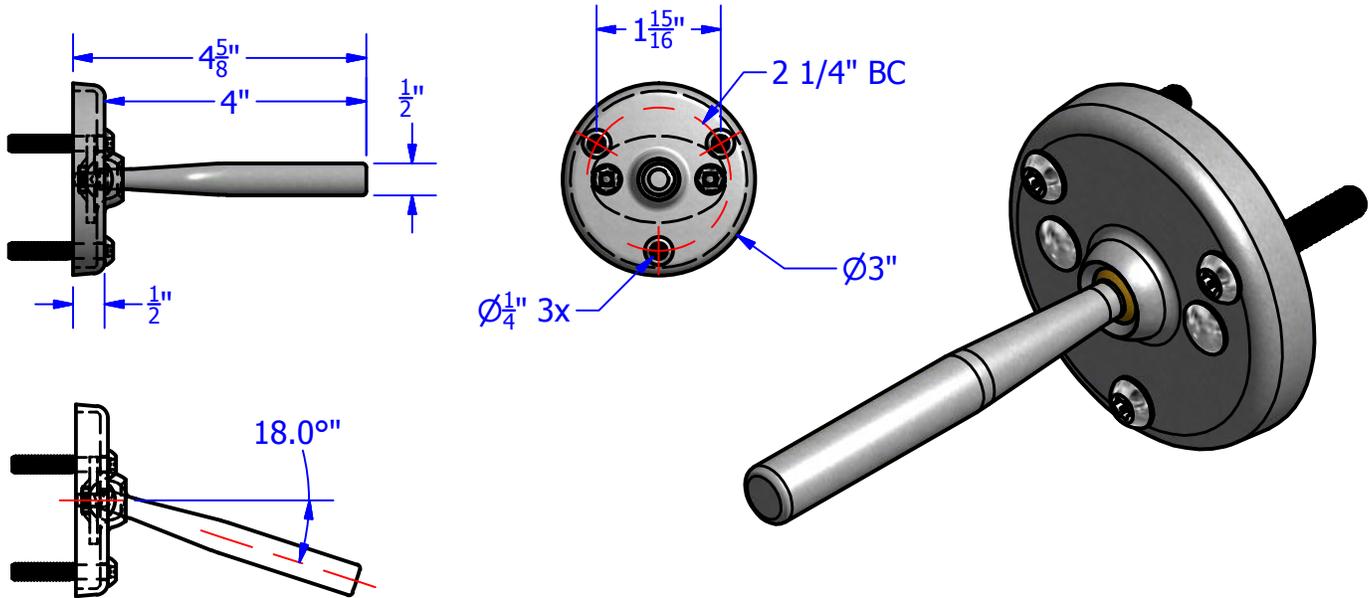

DATA CURRENT AS OF: 2/20/2012

Construction:

FLANGE: 11 GAUGE X 3" DIAMETER TYPE 304 STAINLESS STEEL
 ROD: 1/2"Ø STAINLESS STEEL ROD WITH PIVOTING BALL JOINT THAT RELEASES UNDER EXCESSIVE LOAD.
 SCREWS: 1/4"-20 X 1 1/2" LONG STAINLESS STEEL PIN IN TORX MACHINE SCREW.

Operation:

ROD WITH PIVOTING BALL JOINT RELEASES WHEN EXCESSIVE LOAD IS APPLIED.
 ROD IS RESET BY HAND WHEN REQUIRED.

Installation:

USE THE FLANGE TO MARK HOLES AT DESIRED HEIGHT. INSTALL USING THE (3) SUPPLIED 1/4"-20 X 1 1/2" PIN IN TORX SCREWS TO FASTEN TO THE WALL.
 WALL ANCHORS ARE NOT INCLUDED.
 CAUTION: THE INSTALLATION IS ONLY AS STRONG AS THE ANCHORING DEVICES AND THE WALL ON WHICH IT IS MOUNTED TO.

Guide Specification:

HOLDS ONE STANDARD 5 IN.Ø X 4 1/2" LONG TOILET TISSUE ROLL.
 EXPOSED MOUNTING.
 ROD RELEASES WHEN EXCESSIVE LOAD IS APPLIED.
 ONE PIECE ANTI-LIGATURE CONSTRUCTION, SATIN #4 FINISH.

Brey-Krause Mfg. reserves the right to make changes in design and/or material without formal notice and without incurring any obligation.

© Copyright 2012
 BREY-KRAUSE MANUFACTURING

BREY-KRAUSE MANUFACTURING
 1209 W. Lehigh Street, Bethlehem, PA 18018
 Phone: 610-867-1401 Fax: 610-866-1433
 www.brey-krause.com